



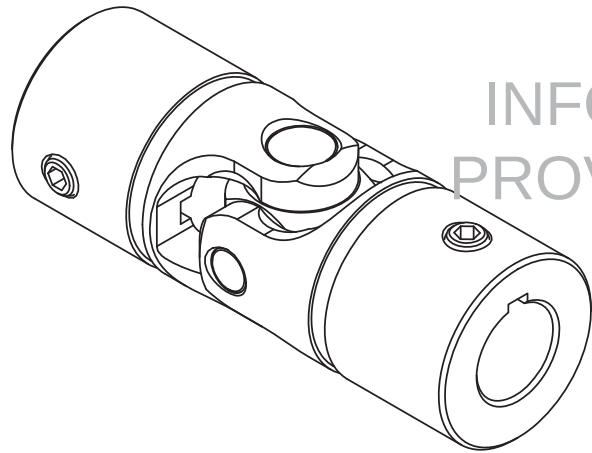

INFORMATION IN THIS DRAWING
PROVIDED FOR REFERENCE ONLY

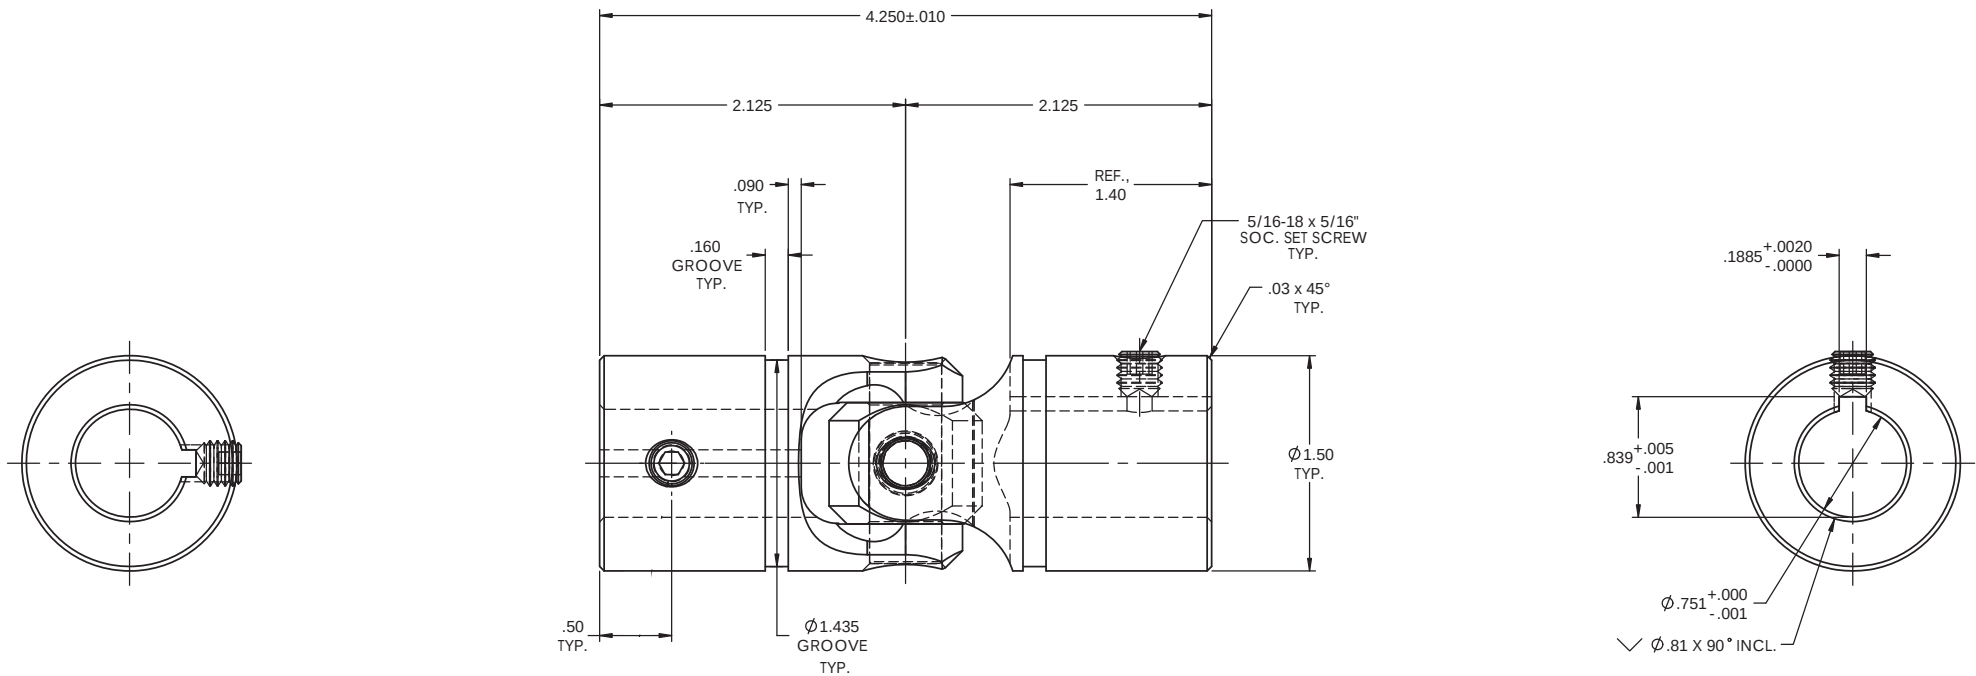

NOTE(s), UNLESS OTHERWISE SPECIFIED.

- (1) UNIVERSAL JOINT IS MARKED w/ "BELDEN" LOGO, PART NUMBER / DRAWING NUMBER, REVISION LEVEL (IF ANY), DATE OF MANUFACTURE (MO/YR), AND BELDEN JOB NUMBER.
- (2) UNIVERSAL JOINT IS LUBRICATED w/ LUBRIPLATE 1200-2, NLGI GRADE 2, AW/EP, LITHIUM GREASE OR EQUIVALENT.
- (3) UNIVERSAL JOINT IS CAPABLE OF OPERATING AT ANY ANGLE UP TO AND INCLUDING 45°.
- (4) UNIVERSAL JOINT HAS STANDARD GROOVES TO ACCEPT INSTALLATION OF PROTECTIVE COVER (BOOT). BOOT AVAILABLE SEPARATELY. REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES.
- (5) REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES FOR TORQUE CAPACITY.
- (6) THIS DRAWING REPRESENTS A STANDARD BELDEN ITEM. CUSTOM UNIVERSAL JOINTS ARE AVAILABLE UPON REQUEST. PLEASE CONTACT BELDEN SALES.

BELDEN PART NUMBER: UJ-HD1500x750K


DO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED CHAMFER ALL HOLES BREAK ALL SHARP CORNERS DE-BURR ALL FEATURES TURNED SURFACES: $\sqrt{63}$ MILLED SURFACES: $\sqrt{125}$ PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BELDEN INCORPORATED. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BELDEN INCORPORATED IS PROHIBITED.	STANDARD TOLERANCES, UNLESS OTHERWISE SPECIFIED	MATERIAL: ALLOY STEEL	NAME DATE		Belden Incorporated www.beldenuniversal.com		
	DIMENSIONS ARE IN INCHES [mm]		DRAWN JP 30MAR12				
	ANGULAR MACHINED: $\pm 1.0^\circ$	SEE DETAIL DRAWINGS	CHECKED RNNK 18APR12	TITLE:		ASSEMBLY, UNIVERSAL JOINT	
	FRACTIONAL: $\pm .015$		ENG APPR: RNNK 18APR12				
	TWO PLACE DECIMAL: $\pm .010$		MFG APPR:				
	THREE PLACE DECIMAL: $\pm .005$		Q.A.				
	FOUR PLACE DECIMAL: $\pm .0005$		COMMENTS:				
	CONCENTRICITY: .0025 T.I.R.	FINISH			SIZE C	UJ- HD1500x750K	REV
	ALL HOLES TO BE LOCATED ON CENTERLINE (C) WITHIN .005" T.I.R.	SEE NOTE(s)					
	INTERPRET GEOMETRIC TOLERANCES I.A.W. ANSI Y14.5M-1992					SCALE: 3:2	WT (lbs): 1.450

BOM Table			
ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	Y12X12-LH	YOKE, LARGE HOLE	1
2	1500-2A	BLOCK	1
3	1500-3A	SMALL PIN	1
4	1500-5A	LARGE PIN	1
5	1500-6A	RETAINING RING	1
6	Y12X12-SH	YOKE, SMALL HOLE	1
7	5/16-18x5/16	SOC. SET SCREW, 5/16-18 x 5/16, CUP POINT, ALLOY STEEL	2

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
-	-	See Sheet1	-	-

INFORMATION IN THIS DRAWING
PROVIDED FOR REFERENCE ONLY

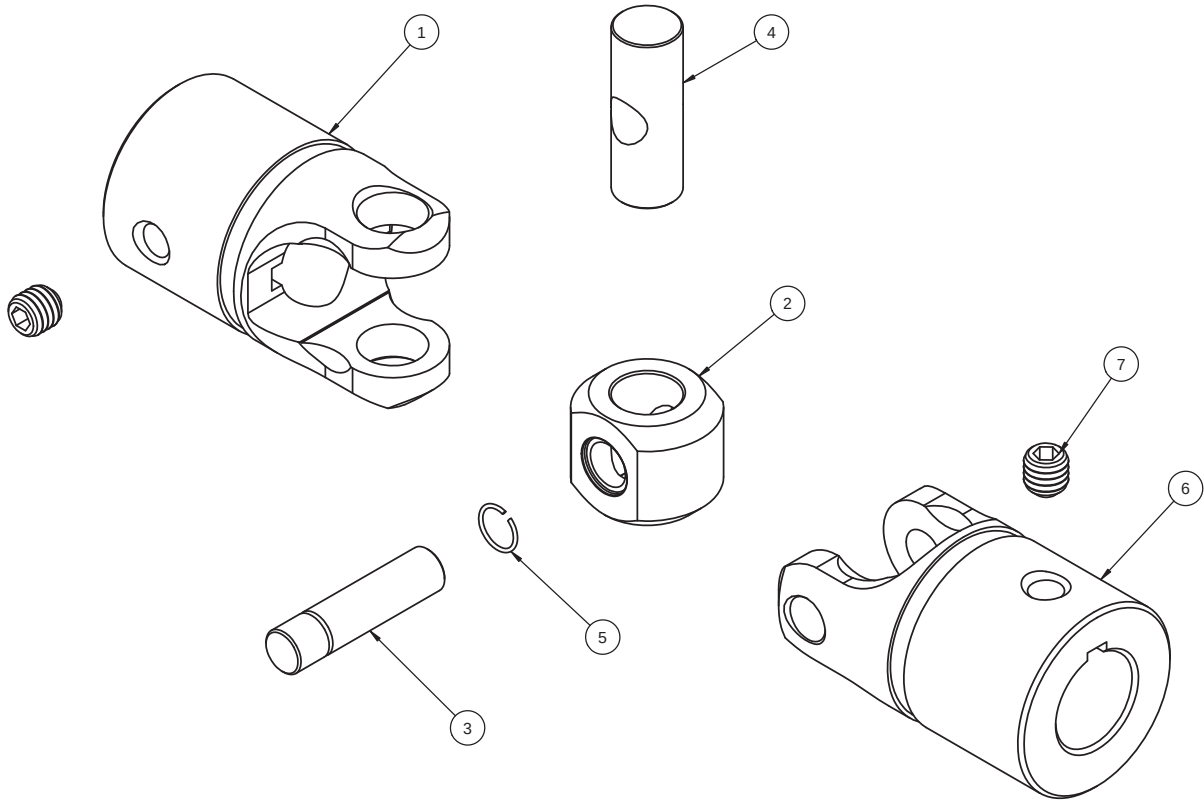

DO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED CHAMFER ALL HOLES BREAK ALL SHARP CORNERS DE-BURR ALL FEATURES TURNED SURFACES: $\sqrt[63]{}$ MILLED SURFACES: $\sqrt[125]{}$ PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BELDEN INCORPORATED. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BELDEN INCORPORATED IS PROHIBITED.	STANDARD TOLERANCES, UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [mm] ANGULAR MACHINED: $\pm 1.0^\circ$ FRACTIONAL: ± 0.015 TWO PLACE DECIMAL: ± 0.010 THREE PLACE DECIMAL: ± 0.005 FOUR PLACE DECIMAL: ± 0.0005 CONCENTRICITY: $.0025$ T.I.R. ALL HOLES TO BE LOCATED ON CENTERLINE (C) WITHIN $.005$ T.I.R. INTERPRET GEOMETRIC TOLERANCES I.A.W. ANSI Y14.5M-1992	MATERIAL ALLOY STEEL HEAT TREAT SEE DETAIL DRAWINGS FINISH SEE NOTE(s)	NAME DATE		Belden Incorporated www.beldenuniversal.com TITLE: ASSEMBLY, UNIVERSAL JOINT
			DRAWN	JP 30MAR12	
			CHECKED	RNK 18APR12	
			ENG APPR.	RNK 18APR12	
			MFG APPR.		
			Q.A.		
			COMMENTS:		
SIZE C	DWG. NO. UJ-WD1500x750K	REV			
			SCALE: 3:2	WT (Lbs): 1.450	SHEET 2 OF 2